


JC10 Rec'd PCT/PTO 07 JAN 2002

FORM PTO-1390 (REV 10-94)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		DOCKET #: 4925-194PUS
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				
				U.S. APPLICATION NO. 10/030358 <small>(If known, see 37 CFR 1.52)</small>
INTERNATIONAL APPLICATION NO. PCT/FI00/00621		INTERNATIONAL FILING DATE 06 July 2000		PRIORITY DATE CLAIMED 09 July 1999
TITLE OF INVENTION Method for Transmitting Coding Information Over Packet Data Network				
APPLICANT(S) FOR DO/EO/US Tommi KOISTINEN				
<p>Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:</p> <p>1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371</p> <p>3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).</p> <p>4. <input type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.</p> <p>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))</p> <p>6. a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).</p> <p>7. b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau.</p> <p>8. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US)</p> <p>9. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).</p> <p>10. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))</p> <p>11. a. <input checked="" type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). (See Reply to Written Opinion)</p> <p>12. b. <input type="checkbox"/> have been transmitted by the International Bureau.</p> <p>13. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p>14. d. <input type="checkbox"/> have not been made and will not be made.</p> <p>15. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</p> <p>16. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). Unexecuted</p> <p>17. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p> <p>Items 11. to 16. Below concern other document(s) or information included:</p> <p>11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</p> <p>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</p> <p>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.</p> <p>14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</p> <p>15. <input type="checkbox"/> A substitute specification.</p> <p>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>17. <input checked="" type="checkbox"/> Other items or information (<i>specify</i>): PCT Publication Sheet, Int'l Preliminary Examination Report, Written Opinion, Reply to Written Opinion, Int'l Search Report, PCT Request, PCT Demand</p>				

JC10 Rspd 10/17/00 07 JAN 2002/

U.S. APPLICATION NO. (If known, see 37 CFR 1.55) 10/030356		INTERNATIONAL APPLICATION NO. PCT/FI00/00621		ATTORNEY'S DOCKET NUMBER 4925-194PUS	
17.[x]The following fees are submitted:					
Basic National Fee (37 CFR 1.492(a)(1)-(5)): Search Report has been prepared by the EPO or JPO\$890.00 International preliminary examination fee paid to USPTO (37 CFR 1.482).....\$710.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)).....\$740.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO\$1040.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)\$100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$	890
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
Claims	Number Filed	Number Extra	Rate		
Total Claims	29 - 20 =	9	x \$18.00	\$	162
Independent Claims	5 - 3 =	2	x \$84.00	\$	168
Multiple dependent claim(s) (if applicable)			+ \$280.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$	1220
Reduction of 1/2 for filing by small entity, if applicable.				\$	
SUBTOTAL =				\$	1220
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
TOTAL NATIONAL FEE =				\$	1220
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by the appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				\$	
TOTAL FEES ENCLOSED					\$1202
Amount to be refunded:				\$	
charged:				\$	
a. [x] One check in the amount of \$ <u>1220</u> to cover the above fee is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. <u>03-2412</u> in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. [x] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>03-2412</u> . A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO: <u>Michael C. Stuart</u> Cohen, Pontani, Lieberman & Pavane 551 Fifth Avenue, Suite 1210 New York, New York 10176			 <u>Michael C. Stuart</u> Registration Number: <u>35,698</u> January 7, 2002 Tel: (212) 687-2770		

10/030356 #4/a

JC10 Rec'd PCT/PTO 07 JAN 2002

By Express Mail # EV052762952US · January 7, 2002

Attorney Docket # 4925-194PUS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re National Phase PCT Application of

Tommi KOISTINEN

International Appln. No.: PCT/FI00/00621

International Filing Date: 06 July 2000

For: Method for Transmitting Coding Information
Over Packet Data Network

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents

Washington, D.C. 20231

BOX PCT

S I R:

Prior to examination of the above-identified application please amend the application as follows:

IN THE SPECIFICATION:

Referring to the Specification as amended by the Response to the Written Opinion dated 1 October 2001,

Page 1, before line 3, the paragraph beginning "The invention relates", insert the following heading:

--FIELD OF THE INVENTION--.

Page 1, before line 7, the paragraph beginning "In conventional", insert the following heading:

--BACKGROUND OF THE INVENTION--.

Page 5, before line 19, the paragraph beginning "The object", insert the following heading:

--SUMMARY OF THE INVENTION--.

Page 9, before line 5, the paragraph beginning "The invention", insert the following paragraph and heading:

--Other objects and features of the present invention will become apparent from the following detailed description considered in conjunction with the accompanying drawings. It is to be understood, however, that the drawings are intended solely for purposes of illustration and not as a definition of the limits of the invention, for which reference should be made to the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS--.

Page 9, before line 24, the paragraph beginning "Fig. 3", insert the following heading:

--DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS--.

Page 19, after line 5 (last line), insert the following paragraph:

-- Thus, while there have been shown and described and pointed out fundamental novel features of the present invention as applied to a preferred embodiment thereof, it will be understood that various omissions and substitutions and changes in the form and details of the devices described and illustrated, and in their operation, and of the methods described may be made by those skilled in the art without departing from the spirit of the present invention. For example, it is expressly intended that all combinations of those elements and/or method steps which perform substantially the same function in substantially the same way to achieve the same results are within the scope of the invention. Substitutions of elements from one described embodiment to another are also fully intended and contemplated. It is the intention, therefore, to be limited only as indicated by the scope of the claims appended hereto.--.

Page 20, line 1, delete "Claims" and insert therefore --What is claimed is:--.

IN THE CLAIMS:

Referring to the Claims as amended by the Response to the Written Opinion dated 1 October 2001,

Amend claims 1, 3, 6, 11, 19 and 23 to read as follows:

1. A method (300, 400, 500) for transmitting information related to tandem free operation, where

- a cellular network comprising a tandem free operation capable coding-decoding unit is connected to a packet network,

- an entity is connected to the packet network and

- data is transmitted over the packet network between said coding-decoding unit on a first side of the packet network and said entity on a second side of the packet network, characterized in that

- information about the decoding capabilities and tandem free operation capabilities on the first side of the packet network is transmitted (320, 420, 520) over the packet network to the second side of the packet network for enabling on said second side of the packet network transmission of data frames to the packet network, when such data frames are either received from said entity or producible using at least information received from said entity, said data frames carrying coded data and signaling information relating to tandem free operation, and the coding of the coded data in the data frames corresponding to the decoding capabilities on the first side.

3. A method according to claim 29, characterized in that said first gateway comprises a media gateway and a media gateway controller, and said information is transmitted from the media gateway controller to the second gateway.

6. A method according to claim 5, characterized in that information about the current coding method that is used in a cellular network the first side of the packet network is inferred (310, 311) from the tandem free operation frames that are comprised in the data flow that comes towards the packet network.

11. A method according to claim 1, characterized in that the calls are transmitted over the packet network using a certain protocol defined for real time applications and information about the decoding capabilities and tandem free operation capabilities on the first side of the packet network are transmitted to the second side of the packet network using a certain control protocol for real time applications.

19. A decoding information transmission arrangement (601), characterized in that

- it comprises means (602) for establishing decoding information about decoders in a cellular network and

- said means (602) for establishing decoding information comprise means for transmitting at least a certain part of said decoding information to a gateway connecting the cellular network to a packet network, for transmitting said at least certain part of said decoding information from the gateway further over the packet network to another side of the packet network, for enabling to the packet network transmission of data frames, when such data frames are either received from its side of the packet network or producible using at least information received from its side of the packet network, said data frames carrying coded data and signaling information relating to tandem free operation, and the coding of the coded data in the data frames corresponding to the decoding capabilities on said another side.

23. A cellular network element (600), characterized in that

- it further comprises means (602) for establishing decoding information about decoders in a cellular network and

- said means (602) for establishing decoding information comprise means for transmitting at least a certain part of said decoding information to a gateway connecting the cellular network to a packet network, for transmitting said at least certain part of said decoding information from the gateway further over the packet network to another side of the packet network, for enabling to the packet network transmission of data frames, when such data frames are either received from its side of the packet network or producible using at least information received from its side of the packet network, said data frames carrying coded data and signaling information relating to tandem free operation, and the coding of the coded data in the data frames corresponding to the decoding capabilities on said another side.

Add the following new claims:

28. A method according to claim 1, characterized in that the entity comprises a second network or a terminal.


29. A method according to claim 1, characterized in that the cellular network is connected to the packet network with a first gateway and said entity is connected to the packet network with a second gateway, and said information is transmitted from the first gateway to the second gateway.

REMARKS

This preliminary amendment is presented to place the application in proper form for examination. No new matter has been added. Early examination and favorable consideration of the above-identified application is earnestly solicited.

Any additional fees or charges required at this time in connection with the application may be charged to our Patent and Trademark Office Deposit Account No. 03-2412.

Respectfully submitted,
COHEN, PONTANI, LIEBERMAN & PAVANE

By: 
Michael C. Stuart
Reg. No. 35,698
551 Fifth Avenue, Suite 1210
New York, N.Y. 10176
(212) 687-2770

7 January 2002

AMENDMENTS TO THE SPECIFICATION AND CLAIMS SHOWING CHANGES

The claims have been amended as follows:

1. A method (300, 400, 500) for transmitting information related to tandem free operation, where

- a cellular network comprising a tandem free operation capable coding-decoding unit is connected to a packet network,

- an entity [, **which can be a second network or a terminal,**] is connected to the packet network and

- data is transmitted over the packet network between said coding-decoding unit on a first side of the packet network and said entity on a second side of the packet network, characterized in that

- information about the decoding capabilities and tandem free operation capabilities on the first side of the packet network is transmitted (320, 420, 520) **[from a first gateway, which connects the cellular network to the packet network,]** over the packet network to the second side of the packet network **[to a second gateway, which connects the cellular network to the packet network]** for enabling on said second side of the packet network transmission of data frames to the packet network, when such data frames are either received from said entity or producible using at least information received from said entity, said data frames carrying coded data and signaling information relating to tandem free operation, and the

coding of the coded data in the data frames corresponding to the decoding capabilities on the first side.

3. A method according to claim [1] 29, characterized in that said first gateway comprises a media gateway and a media gateway controller, and said information is transmitted from the media gateway controller to the second gateway.

6. A method according to claim 5, characterized in that information about the current coding method that is used in a cellular network the first side of the packet network is inferred (310, 311) from the tandem free operation frames that are comprised in the data flow that comes towards the packet network.

11. A method according to claim 1, characterized in that the calls are transmitted over the packet network using a certain protocol defined for real time **[applicationsand]** **applications and** information about the decoding capabilities and tandem free operation capabilities on the first side of the packet network are transmitted to the second side of the packet network using a certain control protocol for real time applications.

19. A decoding information transmission arrangement (601), characterized in that
- it comprises means (602) for establishing decoding information about decoders in a cellular network and

- said means (602) for establishing decoding information comprise means for transmitting at least a certain part of said decoding information **[outside the cellular network]** to a gateway connecting the cellular network to a packet network, for transmitting said at least certain part of said decoding information from the gateway further over the packet network to another side of the packet network, for enabling to the packet network transmission of data frames, when such data frames are either received from its side of the packet network or producible using at least information received from its side of the packet network, said data frames carrying coded data and signaling information relating to tandem free operation, and the coding of the coded data in the data frames corresponding to the decoding capabilities on said another side.

23. A cellular network element (600), characterized in that

- it further comprises means (602) for establishing decoding information about decoders in a cellular network and

- said means (602) for establishing decoding information comprise means for transmitting at least a certain part of said decoding information **[outside the cellular network]** to a gateway connecting the cellular network to a packet network, for transmitting said at least certain part of said decoding information from the gateway further over the packet network to another side of the packet network, for enabling to the packet network transmission of data frames, when such data frames are either received from its side of the packet network or producible using at least information received from its side of the

packet network, said data frames carrying coded data and signaling information relating to tandem free operation, and the coding of the coded data in the data frames corresponding to the decoding capabilities on said another side.

204420-550001

Method for transmitting coding information over packet data network

The invention relates in general to avoiding multiple coding and decoding of data in data connections that involve cellular networks. In particular the invention relates to
5 extending tandem free operation to connections that pass over non-conventional telephony networks.

In conventional PSTNs (Public Switched Telephony Network) the digitized speech is presented in a format that requires 64 kbps for transmission. In cellular networks efficient speech coding methods are used to compress the digitized speech before
10 sending the speech over the radio access network. Decoding is used to obtain a data flow that is similar to the original digitized speech flow, for example, before transmitting the speech further to PSTN. The coding methods used in cellular networks compress the speech to a data flow that can be transmitted using less than 16 kbps in the fixed part of the cellular network. In the radio access network part of the cellular
15 network also channel coding is needed, and the coded speech is also presented in a different format than in the fixed part of the cellular network.

If both the caller and callee use mobile stations then, in the absence of any precautions, the speech is coded and decoded twice, because it needs to be transmitted over a radio access network twice. This double coding may deteriorate the
20 quality of the speech. It is possible to code the speech only once, if the coded speech is transmitted over the cellular networks and possible PSTN in between the cellular networks. This kind of operation is called tandem free operation (TFO).

Fig. 1 presents an example of the tandem free operation in a GSM (Global System for Mobile Communications) network. A one-way connection is presented in Fig. 1
25 for the sake of clarity. Usually connections are bidirectional, and the same functionality is performed in both directions. The mobile station MS1 101 communicates over a radio access network with a base station BS1 102. The digitized speech is coded in the mobile station, using coder C as presented in Fig. 1. Between a mobile station and a base station, the coded speech is presented in a
30 format that is typical for the air interface. From the base station onwards, the coded speech is carried to a transcoder and rate adaptation unit (TRAU) in a certain format called TRAU frames. In Fig. 1 the base station BS1 transmits the coded speech to TRAU1 103. Base station controllers are not involved in the speech coding and are, therefore, not presented in Fig. 1.

The transcoder and rate adaptation unit usually decodes the speech and sends it further as a pulsed code modulation (PCM) signal that carries data with the rate of 64 kbps. The speech is sent to a Mobile Services Switching Center (MSC) which relays it either to another MSC or to the public telephony network. In Fig. 1 the TRAU1 decodes the coded speech (decoder D) and transmits the decoded speech to MSC1 104, and from there the speech is relayed via the PSTN 105 to another cellular network. The MSC2 106 relays the decoded speech further to TRAU2 107, where the speech is coded (coder C') and inserted to TRAU frames. The base station BS2 108 converts the TRAU frames into a radio access network format, and transmits the data over the air interface to the mobile station MS2 109. In this mobile station the coded speech is decoded (decoder D').

The different arrows 110, 111 and 112 in Fig. 1 are used to present the data presentation format and signal carrying the data. Dashed arrows 110 refer to coded speech and the air interface. Solid arrows 111 refer to TRAU frames that require either an 8 kbps or a 16 kbps transmission channel and thick arrows 112 refer to decoded speech that requires a 64 kbps transmission channel and PCM signal.

If both mobile stations and TRAUs involved in a call have a common coder-decoder pair, it is possible to encode the speech only once. In the situation presented in Fig. 1, in tandem free operation the speech is coded in MS1 and decoded in MS2. TRAU1 relays the TRAU frames as TFO TRAU frames within the decoded speech (arrow 113 in Fig. 1). The TRAU1 performs also decoding and the decoded speech is transmitted to TRAU2, but it is used only if TRAU2 cannot extract the TFO TRAU frames from the data it receives. If TRAU2 notices the TFO TRAU frames, it relays the decoded speech carried by the TFO TRAU frames to BS2 in TRAU frames.

Tandem free operation requires thus special functionality, i.e. TFO capability, from the TRAUs. In practice the TFO capability means the following three things. First, the TRAUs can negotiate which coder is used. Second, they can transmit TFO TRAU frames to each other as part of the PCM signal and third, they can extract the TFO TRAU frames from the incoming PCM signal. In GSM the TFO TRAU frames are carried over the PCM so that the one or two least significant bits in each 8 bit long speech sample are replaced by TFO TRAU frame information. The TFO TRAU frame information is carried thus in a 8 kbps or 16 kbps subflow of the 64 kbps PCM flow. The destination TRAU can then ignore the rest of the PCM signal, and relay the TFO TRAU frames as TRAU frames towards the destination mobile station.

The transcoder and rate adaptation units involved in a call negotiate the speech coder using TFO inband signaling. This signaling is performed by modifying certain bits of the TRAU frame structure. The data carried in TRAU frames and TFO TRAU frames is essentially the same except for the TFO signaling bits. In the beginning of a call the TRAU units may each select the coder they use, but if both TRAU support tandem free operation, a common coder may be negotiated. The decoded speech is usually also transmitted in the PCM signal even after a common coder has been agreed on. This is because after a handover, for example, both TRAU involved in the call may not support the tandem free operation.

In the following term TFO frame is used to refer to frames that carry coded data, information about the coder and tandem free operation capability of a coding-decoding unit. These TFO frames are exchanged between coding-decoding units of cellular networks.

The current tandem free operation works between two cellular networks or if the cellular networks are connected via a PSTN. In the recent years, however, there has been an explosive growth in real-time data applications that use packet networks like the Internet as transport medium. These real-time applications can support voice calls and video calls. It is possible to use the Internet or other packet networks as transmission media between cellular networks, instead of PSTN. Especially with the third generation networks that are at least partly packet based, the use of packet networks between the cellular networks is a natural choice.

The H.323 specification has been created by the International Telecommunications Union (ITU) for the purpose of defining a standard framework for audio, video and data communications over networks that do not provide a guaranteed quality of service (QoS). Packet networks, for example, may be such networks. The aim of the H.323 specification is to allow multimedia products and applications from different manufacturers to interoperate.

Fig. 2 presents a situation where two GSM networks are connected with an IP (Internet Protocol) network. Each of the GSM networks 201, 202 is connected to the IP network 203 with an Voice over IP (VoIP) gateway. These VoIP gateways 204, 205 are connected to the MSCs 104, 106. From the cellular network they receive 64 kbps decoded speech as PCM signal (arrows 112 in Fig. 2), and they compress this data flow. The compressed data flow is then transferred over the IP network to another VoIP gateway (arrows 210 in Fig. 2). Usually the compressed data flow requires either 8 kbps or 16 kbps of transmission capacity. The H.323 specification,

- for example, defines certain codecs that can be used for compressing data in H.323 networks. It is also possible to construct proprietary coders and gateways. Term gateway refers here neither to any specific packet network technology nor to any specific standards on telephony over packet networks. It is used as a general term
- 5 for a network element connecting a cellular network and a packet network and relaying calls and other connections to and from the cellular network.

Here terms code and decode refer to methods that are used in cellular networks. Terms compress and decompress refer to methods that are used on the edge of packet networks.

- 10 The problem in using compression in gateways when transmitting calls between cellular networks is that in the worst case the speech (or other data) is coded and decoded three times. First in the originating cellular network, then when transmitted between the cellular networks and finally in the destination cellular network. This may reduce the quality of the speech drastically.
- 15 A further problem is that even in a case, where both coding-decoding units involved in a call are TFO capable, it is possible that this feature cannot be utilized. This is because the TFO frames, which carry information about the data coders and TFO capabilities of the coding-decoding units and which are possible included in the PCM signal, do not necessarily stay unmodified in the compression and
- 20 decompression in the gateways. Especially the TFO signaling, which is carried in certain bits of the TFO frame, is sensitive to change due to compression.

- It is possible to extend the tandem free operation to situation, where a call is transmitted over a packet network, for example by relaying the TFO frames over the packet network. In principle, this relaying ensures that all necessary information, for
- 25 example coded data, indication of the coding method and of the tandem free operation capability, is transmitted over the packet network. On the other side of the network, the TFO frames can be relayed further or the coded data can be decoded and transmitted further. Gateway that can relay TFO frames (or otherwise relay information corresponding to the frames) between a packet network and another
- 30 network are here called tandem free operation capable gateways.

There are problems in extending tandem free operation by straightforwardly relaying the TFO frames or otherwise transmitting the information carried in the frames. The second gateway on the other edge of the packet network may be connected, for example, to a PSTN or to a cellular network that does not support

tandem free operation. The second gateway should, in this case, decode the coded data it receives in the TFO frames, but a suitable decoder is not necessarily supported in the gateway.

5 Even in a case, where a packet network connects two TFO capable coding-decoding units, relaying the TFO frames may not work. In the beginning of a call each pair consisting of a coding-decoding unit and a mobile station selects the coder independently of the other pair. The current tandem free operation does not support the option that a coding unit receives TFO frames, where data is coded with one coder, and before sending, for example, TRAU frames further, it decodes the coded
10 data and re-codes it using a different coder. Therefore, when the TFO frames are relayed over the packet network and the coders used in the cellular networks are different, the downlink gateway must decode the coded data flow. Again, a suitable decoder is not necessarily supported in the gateway.

15 In both these cases the uplink gateway should compress the complete data flow that is carried by, for example, the PCM signal. The downlink gateway could then decompress the data flow it receives and transmit the decompressed data further. But as discussed above, it is not advisable to perform this compression-decompression, if the TFO frames can be relayed over the packet network.

20 The object of the invention is to present a method for enabling a versatile selection of the way in which data is transmitted over a packet network. Especially, the object is to extend the tandem free operation over a packet network by transmitting data using frames that carry coded data as often as possible.

25 The object of the invention is achieved by exchanging over the packet network information about decoders and tandem free operation capabilities supported on each side of the packet network.

A method according to the invention is a method for transmitting information related to tandem free operation, where

- a cellular network comprising a tandem free operation capable coding-decoding unit is connected to a packet network,
- 30 - an entity, which can be a second network or a terminal, is connected to the packet network and
- data is transmitted over the packet network between said coding-decoding unit on a first side of the packet network and said entity on a second side of the packet network, and it is characterized in that information about the decoding

capabilities and tandem free operation capabilities on the first side of the packet network is transmitted from a first gateway, which connects the cellular network to the packet network, over the packet network to the second side of the packet network to a second gateway, which connects said entity to the packet network, for enabling on said second side of the packet network transmission of data frames to the packet network, when such data frames are either received from said entity or producible using at least information received from said entity, said data frames carrying coded data and signaling information relating to tandem free operation, and the coding of the coded data in the data frames corresponding to the decoding capabilities on the first side.

A decoding information exchange arrangement according to the invention is an arrangement for exchanging information over a packet network, which comprises

- means for establishing tandem free operation information about the tandem free operation capability on its side of the packet network and
- means for communicating data structures over the packet network, and it is characterized in that it comprises
- means for establishing decoding information about decoders on its side of the packet network,
- means for establishing a data structure that comprises said tandem free operation information and at least a certain part of said decoding information and
- means for receiving information about tandem free operation capability and decoding information on another side of the network for enabling to the packet network transmission of data frames, when such data frames are either received from its side of the packet network or producible using at least information received from its side of the packet network, said data frames carrying coded data and signaling information relating to tandem free operation, and the coding of the coded data in the data frames corresponding to the decoding capabilities on said another side.

A gateway according to the invention is a gateway for connecting a first network to a certain side of a second network, which second network is a packet network, which gateway comprises

- means for establishing tandem free operation information about the tandem free operation capability on said side of the packet network and
- means for communicating data structures over the packet network, and it is characterized in that it comprises

6a

- means for establishing decoding information about decoders on said side of the packet network,
- means for establishing a data structure that comprises said tandem free operation information and at least a certain part of said decoding information and
- 5 - means for receiving information about tandem free operation capability and decoding information on another side of the network for enabling to the packet network transmission of data frames, when such data frames are either received from its side of the packet network or producible using at least information received from its side of the packet network, said data frames carrying coded data and
- 10 signaling information relating to tandem free operation, and the coding of the coded data in the data frames corresponding to the decoding capabilities on said another side.

A decoding information transmission arrangement according to the invention is characterized in that

- 15 - it comprises means for establishing decoding information about decoders in a cellular network and
- said means for establishing decoding information comprise means for transmitting at least a certain part of said decoding information outside the cellular network.

A cellular network element according to the invention is characterized in that

10030356-021402

- it comprises means for establishing decoding information about decoders in a cellular network and

- said means for establishing decoding information comprise means for transmitting at least a certain part of said decoding information outside the cellular network.

- 5 In the method according to the invention, it is assumed that at least one tandem free capable coding-decoding unit of a cellular network is involved in the connection. The uplink data coming from this cellular network comprises decoded data and TFO frames, which carry coded data, details about the used coder and signaling related to the tandem free operation. In GSM network, for example, these frames are the TFO
10 TRAU frames. If a connection does not involve any TFO capable coding-decoding unit, there is no need to figure out whether to transmit TFO frames over a packet network.

- In the method according to the invention, data is transmitted between the TFO coding-decoding unit of a first cellular network and another network over a packet
15 network. The networks may be connected to each other, for example, by gateways.

The gateways may be able to relay the TFO frames, and some coders and decoders may be implemented in the gateways. The TFO frames relay and coding and decoding functionality may be provided on the edges of the packet network also in some other manner than in gateways.

- 20 In the method according to the invention, information about the decoding functionality that is supported on a first side of the packet network is transmitted to the other side of the network. The decoding functionality may be implemented either in a cellular network (or other network that is connected to the packet network) or, for example, in the gateway that connects the cellular network to the
25 packet network. Information about the TFO frame relay capability on the first side of the packet network is also transmitted. Based on this information, an entity, for example a gateway, on the other side of the packet network may decide, how to transmit data over the packet network.

- 30 The fundamental advantage of the method according to the invention is that the exchange of TFO capabilities and decoding features allows to choose the transmission method so that it minimizes the number of coding-decoding pairs that are used in a connection. This prevents unnecessary deterioration of the quality of the transmitted data. It may also save some processing power in the network elements, for example in the coding-decoding units and in the gateways. These elements may

only relay coded data instead of decoding the data. The exchange of TFO capabilities and decoding features also makes it possible to load necessary coders or decoders to a gateway before it receives from the packet network data that needs to be processed using the coders or decoders.

- 5 The capability information that is transmitted in the method according to the invention enables the gateways, for example, to select how they transmit data over the packet network. The gateway that connects a cellular network to the packet network may, for example, relay the TFO frames as such. Another option is that it decodes the data it receives, re-codes it using another coder and transmits the re-coded data in TFO frames. It may also compress the whole data flow it receives and transmit the compressed data.

Similarly, the gateway that connects the other network to the packet network has also many options. If the gateway, for example, receives uncoded data, it may code the data using a coder corresponding to the decoder that is employed, for example, in the endpoint of a connection. This way the data that is transmitted over the packet network and the cellular network is coded only once.

- One advantage of the method according to the invention is that it works without modifying current cellular networks. The gateways, for example, on the edge of the packet network can establish the necessary information about decoding features by monitoring the TFO frames. This monitoring provides information about the decoding method that is employed in the present connection in the cellular network.

- Further advantages can be achieved, if a cellular network can transmit information about the coding and decoding methods that it supports. For example, a coding-decoding unit may accept TFO frames where one coder has been applied, decode the received coded data and then code the data using another coder. In this case, TFO frames where one coder has been applied can be decided to be relayed over the packet network and further to the cellular network. There the coding-decoding unit modifies the data before sending it to the endpoint of the connection.

- Further, if the cellular networks and gateways transmit information about the coding and decoding features and the TFO capability of the gateways, the coder or coders (if different coders are used in the opposite directions, for example) may be negotiated already when a call is being established. This way the tandem free operation may be turned on from the beginning of a call. Currently the tandem free operation is negotiated between the coding-decoding units only after a certain coder

has already been selected separately by each coding-decoding unit and the mobile station that communicates with it.

Further advantages of the invention are discussed in connection with the preferred embodiments of the invention.

- 5 The invention will now be described more in detail with reference to the preferred embodiments by the way of example and to the accompanying drawings where

Fig. 1 shows a schematic drawing of a call between two mobile stations,

Fig. 2 shows a schematic drawing of a call between two mobile station that is passing a packet network,

- 10 Fig. 3 shows a schematic drawing of a method according to a first preferred embodiment of the invention where information about decoding is inferred from TFO frames,

- 15 Fig. 4 shows a schematic drawing of a method according to a second preferred embodiment of the invention where information about decoding is transmitted from a cellular network to a gateway,

Fig. 5 shows a schematic drawing of a method according to a third preferred embodiment of the invention where coding and decoding is negotiated when a call is established and

- 20 Fig. 6 shows an arrangement and network elements for transmitting TFO information according to a fifth preferred embodiment of the invention.

Above in conjunction with the description of the prior art reference was made to Figs. 1 and 2. The same reference numerals are used for corresponding parts in the figures.

- 25 Fig. 3 presents a method 300 according to a first preferred embodiment of the invention where information about the decoding capabilities and TFO capabilities on a first side of the packet network is transmitted to the other side of the packet network. One of the networks connected to the packet network is a cellular network. Data about decoding capabilities of the cellular network is established by monitoring the TFO frames. This method is applicable to, for example, the GSM
30 network and TFO TRAU frames.

The cellular network 301, where a tandem free operation capable coding-decoding unit 302 is involved in the connection, is connected to the packet network 303. A gateway GW1 304 may be used to connect the cellular network 301 to the packet network 303. On the other side of the packet network there is another network 305, which is connected to the packet network, for example, with the gateway GW2 306.

On the edges of the packet network, for example in the gateways, certain coders and decoders may be implemented. The set of coders implemented in the first gateway 304 is marked by $C(GW1)$ and the set of decoder by $D(GW2)$. Similarly, $C(GW2)$ and $D(GW2)$ refer to the coders and decoders implemented in the second gateway 306.

When a connection has been established between, for example, a mobile terminal in the cellular network 301 and another endpoint in the second network 305, data begins to flow in both directions of the connections (assuming that the connection is bidirectional).

Let us first consider the direction from the cellular network 301 to the second network 305. The uplink data flow from the cellular network comprises TFO frames where data coded with coder C_1 is carried. The coder is indicated in the TFO frames, as well as the decoder D_2 that is used to decode the downlink data. The decoder D_2 may correspond to the coder C_1 , but it does not have to do so. The coding-decoding unit 302 and a mobile station may use a different coder-decoder pair C_1 - D_1 to modify the uplink data than the one C_2 - D_2 used to modify the downlink data. If the decoder corresponding to coder C_1 is noted with C_1^{-1} , then the D_2 corresponds to C_1 may be marked in the following way: $C_1^{-1} = D_2$.

The gateway 303 may thus infer from the TFO frames information about the coder C_1 and decoder D_2 . This is presented in Fig. 3 with arrow 310. It transmits (arrow 320) information about the decoder D_2 , the decoders $D(GW1)$ that it supports and information that it is TFO capable over the packet network. The TFO capability may be stated implicitly by transmitting the capability information. It may be stated explicitly, for example with a certain TFO indicator in a signaling message, too.

The second gateway 306 can similarly infer information about the coder C_3 and decoder D_4 that are possibly employed in the second network 305 (arrow 311). The second network is not restricted anyhow, so it may be, for example, a PSTN. If it is a PSTN, no coders or decoders are employed there.

The second gateway receives the information about the capabilities on the other side of the packet network. Thereafter it can decide, how to transmit over the packet network the data it receives from the second network 305. If, for example, the first gateway is not TFO capable, the second gateway may have to compress the whole data flow it receives and thereafter transmit the compressed data. A common compress-decompress method pair is here assumed for all gateways.

If the first gateway is TFO capable, the second TFO gateway has better options. Let us consider first a situation, where the data flow which the TFO capable second gateway 306 receives from the second network 305 comprises TFO frames. In this case, the second gateway can relay the TFO frames, for example, if the endpoint of the connection can decode the data in the frames, i.e. $C_3^{-1} = D_2$. If the cellular network 301 requires that the data flow coming to it comprises the decoded data in addition to the TFO frames, then there are two options. Either the first gateway 303 decodes the data, i.e. $C_3^{-1} \in D(\text{GW1})$, or the second gateway 306 decodes the coded data that the TFO frames carry and codes it again with a coder C_5 whose decoder C_5^{-1} the first gateway supports. With respect to avoiding extra coding, this coding and decoding in the second gateway is advantageous only when $C_5^{-1} = D_2$ and $D_2 \in D(\text{GW1})$. In this case, the TFO frames that the second gateway 306 transmits towards the cellular network 301 may be relayed over the air interface to the mobile station. But if the conservation of TFO signaling bits is the main object, then it may be advisable to perform the coding and decoding in the second gateway also when $C_5^{-1} \neq D_2$ and $C_5^{-1} \in D(\text{GW1})$.

In a situation, where the second gateway 306 does not receive from the second network 305 TFO frames, it may decode the data it receives with D_2^{-1} , if $D_2^{-1} \in C(\text{GW2})$. If the first gateway has to decode the coded data in TFO frames, then the condition $D_2 \in D(\text{GW1})$ has to be true, too. Otherwise it may be the only option to compress the data.

The second gateway may select the transmission method based on the information it infers from the TFO frames and on the information it receives from the first gateway. There is necessarily no need to negotiate the transmission method with the first gateway if, for example, it has been predetermined that TFO frames that come from the packet network are always relayed further within a decoded data flow.

Let us next consider the direction from the second network 305 to the cellular network 301. The second gateway transmits information about its TFO capabilities, its decoder $D(\text{GW2})$ and about the possible decoder D_4 (arrow 321). Based on this

information the first gateway 303 may decide, whether to transmit the TFO frames. For example, if the second gateway does not specify a decoder D_4 , the first gateway may infer that the sufficient condition for transmitting TFO frames is $C_1^{-1} \in D(\text{GW2})$. This guarantees that the second gateway can decode the coded data in the TFO frames, and thereafter transmit it further. The data is thus coded in, for example, a mobile station with coder C_1 and decoded only on the other side of the packet network. Otherwise the data may have to be compressed and decompressed on the edges of the network. This reduces the quality of the transmitted data.

If the second gateway specifies a decoder D_4 , then similar conditions as presented for the first gateway and the decoder D_2 may be used in selecting the transmission method.

If the TFO signaling can be carried between the coding-decoding units and if the TFO negotiations succeed, thereafter the employed coders and decoders should fulfill the following conditions: $C_1^{-1} = D_4$ and $C_3^{-1} = D_2$. As stated above, if neither of the cellular networks requires the incoming signal to comprise decoded data, the TFO frames at this point can be simply relayed between the gateways.

The above conditions for choosing TFO frame relay or for compressing the whole received data flow are presented as examples. The scope of the discussion above is to show that already by exchanging only the specified information (TFO, D, D(GW)), it is possible to implement versatile logic for selecting the transmission method.

If one of the gateways does not send information about the TFO and decoding capabilities, the other may infer that it is not TFO capable. In this case the only option to transmit data over the packet network is probably to compress the whole data flow.

Fig. 4 presents a method 400 according to a second preferred embodiment of the invention where a cellular network informs a gateway about the coders and decoders it supports. The cellular network 401 is connected to a packet network 302 with, for example, the first gateway 402. The second cellular network 403 is connected to the packet network with, for example, the second gateway 404.

The arrow 410 presents the information about coders $C(\text{CN1})$ and decoders $D(\text{CN1})$ that the cellular network 401 transmits to the first gateway 402. These are the coders and decoders that the cellular network, for example in the TFO capable coding-decoding unit that is involved in the connection, supports. For simplicity, let us

assume that the cellular networks 401 and 403 accept incoming data that contains only TFO frames if the cellular networks support the decoder that is needed to decode the data in the TFO frames. The coding-decoding units, for example, may decode the data in TFO frames and re-code it using the coder they use in
 5 communication with a mobile station. The re-coded data is then transmitted to the mobile station.

The gateways 402 and 404 may infer the coder and decoder that are used in each of the cellular networks similarly as the gateways 303 and 306 presented in Fig. 3. The arrow 310 presents, how the gateway 402 infers the employed coder C_1 and decoder
 10 D_2 , and arrow 311 presents similarly, how the gateway 404 infers the employed coder C_3 and decoder D_4 . It is also possible that a coding-decoding unit transmits information about these coder and decoder directly to a gateway. It is clear that the following statements are true: $C_1 \in C(\text{CN1})$, $D_2 \in D(\text{CN1})$, $C_3 \in C(\text{CN2})$ and $D_4 \in D(\text{CN2})$.

15 The first gateway 402 transmits the following information to the second gateway: TFO capability, the employed decoder D_2 , and the supported decoders $D(\text{CN1})$ and $D(\text{GW1})$. This is presented in Fig. 4 with the arrow 420. In the system presented in Fig. 4 it is possible to relay TFO frames which carry data coded with C_3 over the packet network from the cellular network 403 to the cellular network 401, if $C_3^{-1} =$
 20 D_2 . In this case, the data is coded and decoded only once over the connection (see arrow 430, where solid circles refer to coding and open circles refer to decoding). The TFO frames can be relayed from the second gateway 404 also if $C_3^{-1} \in D(\text{CN1})$. In this case, the first cellular network may decode the data in the TFO frames and re-code it using D_2^{-1} (arrow 431). The decoding and re-coding may be,
 25 optionally, carried out in the second gateway, if $C_3^{-1} \in D(\text{GW2})$ and $D_2^{-1} \in C(\text{GW2})$, see arrow 432. If information $C(\text{GW1})$ about the coders supported in the first gateway 402 is also transmitted to the second gateway, then it may relay the TFO frames also when $C_3^{-1} \in D(\text{GW1})$ and $D_2^{-1} \in C(\text{GW1})$. In this case the first gateway decodes the data in the TFO frames and re-codes it using D_2^{-1} (arrow 433).

30 Similarly, the second gateway 404 transmits information about the TFO capability, the employed decoder D_4 , and the supported decoders $D(\text{CN2})$ and $D(\text{GW2})$ over the packet network (arrow 421). As to the other direction, it is possible to relay the TFO frames, for example, if $C_1^{-1} \in D(\text{GW2})$. If the second network 403 is not a cellular network but, for example, a fixed network, then the sets $C(\text{CN2})$ and
 35 $D(\text{CN2})$ are empty.

Again, the above conditions for choosing TFO frame relay or for compressing the whole received data flow are presented as examples. Here it was noticed that in some cases the information about the coders that are supported in the gateways may be worth to transmit over the packet network.

- 5 Fig. 5 presents a method 500 according to a third preferred embodiment of the invention where the employed coders and decoders are negotiated between the cellular networks. The negotiation can be carried out directly between the cellular networks or via gateways. The negotiation is carried out already when establishing the connections, so the gateways do not have to infer the coders and decoders from
10 the TFO frame flows. The gateways may perform some decoding and re-coding as in the method according to the second preferred embodiment of the invention.

- The cellular network 501 transmits to the gateway 502 that connects it to the packet network 302 information at least about the supported decoders D(CN1). This is presented with the arrow 510 in Fig. 5. Similarly, the cellular network 503 transmits
15 to the gateway 504 that connects it to the packet network 302 information about the decoders D(CN2) (arrow 511).

- The gateways exchange information about the TFO capabilities of the gateways and the decoding capabilities of the cellular networks (arrows 520, 521). This information is transmitted further to the cellular networks (arrows 530, 531). Now
20 each cellular network knows the decoding capabilities of the other, and they can negotiate (arrow 540) the coding and decoding methods that are used in this connection. If there are (at least one) coders that are supported in this network and the corresponding decoders are supported in the other network, it is advisable to choose the coder used in this network among those coders. If such a common coder-
25 decoder pair can be chosen, the gateways may be told just to relay the frames. In this case, the gateways do not have to monitor the TFO frame flow to figure out how to transmit it over the packet network or to figure out if they have to decode and re-code the data in the TFO frames. If the gateways support decoding and re-coding, then the decoding information that is transmitted over the packet network
30 and that is presented with arrows 520, 530 and arrows 521, 531 may comprise also D(GW1) and D(GW2), respectively.

If a common coder-decoder pair cannot be chosen, the decoding and re-coding can possibly be made in the cellular networks. Also in this case the gateways can be told just to relay the TFO frames.

This method according to the third preferred embodiment of the invention can be applied, for example, in the Universal Mobile Telecommunication Networks (UMTS) which are connected to each other with a packet data network. In UMTS, the Call Control can restrict the coding-decoding methods a UMTS-TRAU and a mobile station employ between themselves. The Call Control can receive the information about the decoders that are supported in the other cellular network from the gateway. It can also tell the gateway just to relay the TFO frames.

If both the cellular networks involved in a connection are UMTS networks, then there may be a separate protocol which the Call Control units use in the coder negotiation when establishing the connection. The data may be transmitted via the gateways as presented in Fig. 5.

In a method according to a fourth preferred embodiment of the invention, new protocol messages or additions to existing protocol messages are defined for enabling the exchange of TFO capabilities and decoding capabilities. There are specific protocols for transmitting data for real time application over packet networks, for example the Real-time Transmission protocol (RTP) is used especially in IP networks.

Between gateways, the calls that are transferred over RTP may be multiplexed and transmitted over a single RTP connection. The RTP Control Protocol (RTCP) is used to transmit certain control commands between the endpoints of the RTP connection. The RTCP is used, for example, when a call is established, to pass information about the endpoints of a call. During a call, the RTCP provides feedback on the quality of the data distribution.

Consider a gateway that connects a cellular network to an IP network and uses RTP to transmit calls over the IP network. This gateway may, for example, monitor the data flow from the cellular network. After noticing TFO frames in the data flow, it may use a certain RTCP message to inform the other gateway about, for example, the following issues: the TFO capability of the gateway, the decoder used in the cellular network and the decoders that the gateway supports.

There are five types of RTCP packets, and the APP (application) type that is defined for application specific functions may be the most suitable for the transmitting TFO and decoding capabilities. Each RTCP packet begins with a certain header, followed by structured elements that may be of variable length according to the packet type. The structured elements contains consecutive payload identifiers and payloads

carrying the specified information. New payload types, for example gateway TFO capabilities, current decoder and gateway decoder capabilities may be defined. The gateways decoder capabilities payload, for example, may be a list of the decoders the gateway supports and in the beginning of the payload the number of decoders in the list may be defined.

It is also possible to transmit information about the TFO capabilities and decoding capabilities, for example, in a RTP packet by defining a new payload type for RTP packets. The payload of the RTP packet can comprise similar information as above mentioned payload of the RTCP APP packet.

In H.323 networks it is possible to transmit the TFO and decoding capabilities using H.245 signaling. The advantage of H.245 signaling compared to the RTP or RTCP messages is that all H.323 gateways support H.245 signaling. The H.245 signaling specification defines the exchange of capability information between H.323 endpoints. By modifying this signaling so that each endpoint, for example, sends its TFO capability information and lists the decoders it supports to the other endpoint the gateways may exchange information about these issues. The TFO information exchange messages may be, for example, similar to the terminalCapabilitySet message.

To a man skilled in the art it should be clear how to modify the RTP or RTCP packets or H.245 messages so that information about TFO capabilities and decoding capabilities can be exchanged. Above some possible modifications to the packets and messages have been discussed briefly.

It is possible that a gateway 304, 306, 402, 404, 502 or 504 comprises a Media Gateway (MG) and a Media Gateway Controller (MGC). In this case, information about the TFO capabilities, about the current decoder and/or decoding capabilities is typically transmitted using the following route: MG1 – MGC1 – MGC2 – MG2 (typically in both directions). The information transmitted between two MGCs, between a MGC and a MG, or between a gateway GW and a MGC can be, for example, such information as is presented with arrows 320, 420, 520 or with arrows 321, 421, 521. Between two Media Gateway Controllers or between a gateway GW and a Media Gateway Controller the information can be exchanged, for example, using modified RTP or RTCP packets or using H.245 messages. Between Media Gateway and a Media Gateway Controller the information can be exchanged, for example, using a protocol designed specifically for this purpose or using an enhanced version of protocol H. 248. If a cellular network informs a gateway about

its coding/decoding capabilities (arrows 410, 411, 510, 511), this information can be transmitted from the cellular network to a Media Gateway, which transmits the information further to a Media Gateway Controller, or directly to a Media Gateway Controller.

- 5 Fig. 6 presents arrangements according to a fifth preferred embodiment of the invention. The decoding information exchange arrangement 611 comprises a block 612 where decoding information about the decoding capabilities on this side of the packet network is established. On this side of the packet network refers here to the gateway and/or to the cellular network. Information about the decoders supported
10 by the cellular network may be included, for example, to a configuration file, or the information may be received online from the cellular network (decoding information block 602 in decoding information transmission arrangement 601) .

- The decoding information block 612 may comprise a block 613 that is responsible for inferring the coder and/or decoder in the current connection. The information
15 can be inferred from the TFO frames or there may be in the cellular network a TFO extension arrangement 601, which contain a block 603 that indicates the coder and decoder that are in use in a certain connection.

- The decoding information exchange arrangement has information about the TFO capability on the edge of the packet network, for example in a gateway (block 614).
20 Information from blocks 612-614 is gathered and a data structure that comprises at least part of the coding information and the TFO capability information is constructed in data structure block 615. The data structure is sent over the packet network using the input-output block 616. The same I/O block is used to receive data from a similar gateway arrangement, and from the received data the decoding
25 and TFO capabilities on the other side of the packet network are inferred (block 617). If not data is received, it is possible to conclude that the other gateway does not support any coders or decoders, and that it is not TFO capable.

- Based on the received information a decision how to process the incoming TFO frames is made in the decision block 618. It is possible that the cellular network
30 gives instructions (block 605), which the decoding information exchange arrangement receives (block 619) and which affect the decision to process the TFO frames.

The decoding information transmission arrangement 601 in the cellular network may comprise also a negotiation block (604) which can receive and send

information about the available coders and decoders and negotiate the coder and decoder that will be employed in a certain connection. This negotiation can be made already during the call establishment.

5 The decoding information exchange arrangement 611 is preferably implemented in the gateway 610 that connects a network to the packet network. If the network that the gateway connects to the packet network is a not a cellular network, the block 613 does not have to be implemented. If the gateway comprises a Media Gateway and a Media Gateway Controller, then the decoding information exchange arrangement 611 is typically part of the Media Gateway Controller. The Media
10 Gateway is responsible, for example, for performing actual decoding-coding (as illustrated in Figure 4), if there is need for such functionality in a certain connection.

The decoding information transmission arrangement 601 may be implemented in a certain cellular network element 600. It may be implemented, for example, in the
15 coding-decoding unit.

Consider a situation where a terminal equipment that supports the coders and decoders that are used in cellular networks is connected directly to the packet network. Further, the terminal equipment can send and received coded data in TFO frames. If the terminal equipment comprises the decoding information exchange
20 block 611, then the terminal may send information about its decoding capabilities and receive information about the decoding capabilities of a cellular network on the other side of the packet network.

If a coding method corresponding to the decoding method used in, for example, a mobile station in the cellular network is implemented in the terminal equipment, the
25 terminal may choose that coding method for coding data. The coded data may then be transmitted in TFO frames to the cellular network. In the opposite direction the coding method in the cellular network may be chosen so that the terminal equipment supports the corresponding decoder. Another option is that the cellular network or the gateway connecting the cellular network to the packet network performs
30 decoding and re-coding.

The terminal equipment may be, for example, an H.323 terminal that comprises the decoding information exchange block 611. The packet network may be, for example, an IP network over which H.323 telephony is carried out.

- The invention does not restrict the choice of the data transmission method over the packet network. By changing information about the decoding and tandem free operation capabilities on each side of the packet network according to the invention, the gateways, the networks connected to the packet network or the endpoints of a
- 5 connection can select a suitable way to process the data that is to be transmitted.

Claims

1. A method (300, 400, 500) for transmitting information related to tandem free operation, where
- a cellular network comprising a tandem free operation capable coding-decoding unit is connected to a packet network,
 - an entity, which can be a second network or a terminal, is connected to the packet network and
 - data is transmitted over the packet network between said coding-decoding unit on a first side of the packet network and said entity on a second side of the packet network, **characterized in that**
 - information about the decoding capabilities and tandem free operation capabilities on the first side of the packet network is transmitted (320, 420, 520) from a first gateway, which connects the cellular network to the packet network, over the packet network to the second side of the packet network to a second gateway, which connects said entity to the packet network, for enabling on said second side of the packet network transmission of data frames to the packet network, when such data frames are either received from said entity or producible using at least information received from said entity, said data frames carrying coded data and signaling information relating to tandem free operation, and the coding of the coded data in the data frames corresponding to the decoding capabilities on the first side.
2. A method according to claim 1, **characterized in that** information about the decoding capabilities and tandem free operation capabilities on the second side of the packet network is transmitted (321, 421, 521) to the first side of the packet network.
3. A method according to claim 1, **characterized in that** said first gateway comprises a media gateway and a media gateway controller, and said information is transmitted from the media gateway controller to the second gateway.
4. A method according to claim 1, **characterized in that** the tandem free operation capabilities and decoding capabilities on the first side of the packet network and the current decoding method that is used in the cellular network on said side of the packet network are transmitted (320) to the second side of the packet network.

5. A method according to claim 4, **characterized** in that information about the current decoding method is inferred (310, 311) from the tandem free operation frames that are comprised in the data flow that comes towards the packet network.
6. A method according to claim 5, **characterized** in that information about the current coding method that is used in a cellular network the first side of the packet network is inferred (310, 311) from the tandem free operation frames that are comprised in the data flow that comes towards the packet network
7. A method according to claim 4, **characterized** in that information about the decoding capabilities of the cellular network on the first side of the packet network is transmitted (420, 520) to the second side of the packet network.
8. A method according to claim 7, **characterized** in that information about the decoding capabilities of the cellular network on the first side of the packet network is established (410, 510) by transmitting said information from said cellular network.
9. A method according to claim 7, **characterized** in that said entity is a cellular network, and
- the coding and decoding capabilities of each cellular network is transmitted to the other cellular network and
 - the coding and decoding methods used in a certain connection are negotiated (540) between the cellular networks when the connection is established.
10. A method according to claim 9, **characterized** in that instructions how to transmit the data flow coming from each cellular network are transmitted (550, 551) from the cellular networks towards the packet network.
11. A method according to claim 1, **characterized** in that the calls are transmitted over the packet network using a certain protocol defined for real time applications and information about the decoding capabilities and tandem free operation capabilities on the first side of the packet network are transmitted to the second side of the packet network using a certain control protocol for real time applications.
12. A method according to claim 11, **characterized** in that information about the decoding capabilities and tandem free operation capabilities is transmitted in RTCP messages.

13. A method according to claim 11, **characterized** in that information about the decoding capabilities and tandem free operation capabilities is transmitted in RTP messages.

5 14. A method according to claim 11, **characterized** in that information about the decoding capabilities and tandem free operation capabilities is transmitted in H.245 signaling messages.

15. A decoding information exchange arrangement (611) for exchanging information over a packet network, which comprises

- 10 - means (614) for establishing tandem free operation information about the tandem free operation capability on its side of the packet network and
- means (616) for communicating data structures over the packet network, **characterized** in that it further comprises
- 15 - means (612) for establishing decoding information about decoders on its side of the packet network,
- means (615) for establishing a data structure that comprises said tandem free operation information and at least a certain part of said decoding information and
- 20 - means (617) for receiving information about tandem free operation capability and decoding information on another side of the network for enabling to the packet network transmission of data frames, when such data frames are either received from its side of the packet network or producible using at least information received from its side of the packet network, said data frames carrying coded data and signaling information relating to tandem free operation, and the coding of the coded data in the data frames corresponding to the decoding capabilities on said another side.

25 16. An arrangement according to claim 15, **characterized** in that

- said means (612) for establishing decoding information comprise means (813) for establishing information about a decoder used in a certain connection over the packet network.

30 17. An arrangement according to claim 15, **characterized** in that it further comprises means (619) for receiving instructions about the processing of tandem free operation frames.

18. A gateway (610) for connecting a first network to a certain side of a second network, which second network is a packet network, which gateway comprises

- means (614) for establishing tandem free operation information about the tandem free operation capability on the said side of the second network and
- means (616) for communicating data structures over the second network, characterized in that it further comprises

- 5 - means (612) for establishing decoding information about decoders on said side of the second network,
- means (615) for establishing a data structure that comprises said tandem free operation information and at least a certain part of said decoding information and
- 10 - means (617) for receiving information about tandem free operation capability and decoding information on another side of the second network for enabling to the packet network transmission of data frames, when such data frames are either received from its side of the packet network or producible using at least information received from its side of the packet network, said data frames carrying coded data and signaling information relating to tandem free operation, and the coding of the
- 15 coded data in the data frames corresponding to the decoding capabilities on said another side.

19. A decoding information transmission arrangement (601), characterized in that

- it comprises means (602) for establishing decoding information about decoders in a cellular network and

- 20 - said means (602) for establishing decoding information comprise means for transmitting at least a certain part of said decoding information outside the cellular network.

20. An arrangement according to claim 19, characterized in that said means (602) for establishing decoding information comprise means (603) for establishing
- 25 information about a decoder used in a certain connection.

21. An arrangement according to claim 19, characterized in that

- said means (602) for establishing decoding information comprise means for establishing information about the coders and decoders available in the cellular network and
- 30 - the arrangement further comprises means (604) for negotiating the coder and decoder used in a certain connection.

22. An arrangement according to claim 21, characterized in that it further comprises means (605) for instructing network elements outside the cellular network to process the data which is transmitted along the said connection.

23. A cellular network element (600), **characterized** in that

- it further comprises means (602) for establishing decoding information about decoders in a cellular network and

5 - said means (602) for establishing decoding information comprise means for transmitting at least a certain part of said decoding information outside the cellular network.

24. A cellular network element according to claim 23, **characterized** in that said means (602) for establishing decoding information comprise means (603) for establishing information about a decoder used in a certain connection over the
10 packet network.

25. A cellular network element according to claim 23, **characterized** in that it further comprises means (604) for negotiating the coder and decoder used in a certain connection with another cellular network.

26. A cellular network element according to claim 25, **characterized** in that it
15 further comprises means (605) for instructing network elements outside the cellular network to process the data which is transmitted along the said connection.

27. A cellular network element according to claim 25, **characterized** in that it is a network element of an UMTS network.

204420-9550001

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 January 2001 (18.01.2001)

PCT

(10) International Publication Number
WO 01/05113 A2

(51) International Patent Classification⁷: H04L 29/00

(21) International Application Number: PCT/FI00/00621

(22) International Filing Date: 6 July 2000 (06.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
991583 9 July 1999 (09.07.1999) FI

(71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; P.O. Box 300, FIN-00045 Nokia Group (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): KOISTINEN, Tommi [FI/FI]; Kyyhkysmäki 22 B 19, FIN-02600 Espoo (FI).

(74) Agent: BERGGREN OY AB; P.O. Box 16, FIN-00101 Helsinki (FI).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— Without international search report and to be republished upon receipt of that report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR TRANSMITTING CODING INFORMATION OVER PACKET DATA NETWORK

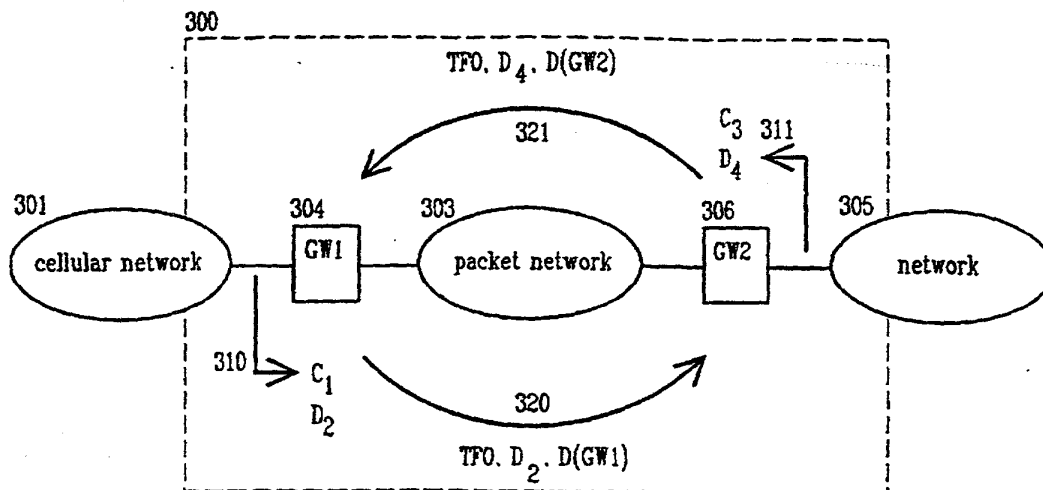

(57) Abstract: The invention relates to a method (300, 400, 500) for transmitting information related to tandem free operation, where a cellular network comprising a tandem free operation capable coding-decoding unit is connected to a packet network, an entity, which can be a second network or a terminal, is connected to the packet network and data is transmitted over the packet network between said coding-decoding unit on a first side of the packet network and said entity on a second side of the packet network. The method according to the invention is characterized in that information about the decoding capabilities and tandem free operation capabilities on the first side of the packet network is transmitted (320, 420, 520) over the packet network to the second side of the packet network. The invention relates also to a decoding information exchange arrangement (611), to a gateway (610), to a decoding information transmission arrangement (601) and to a cellular network element (600).

WO 01/05113 A2

1/4

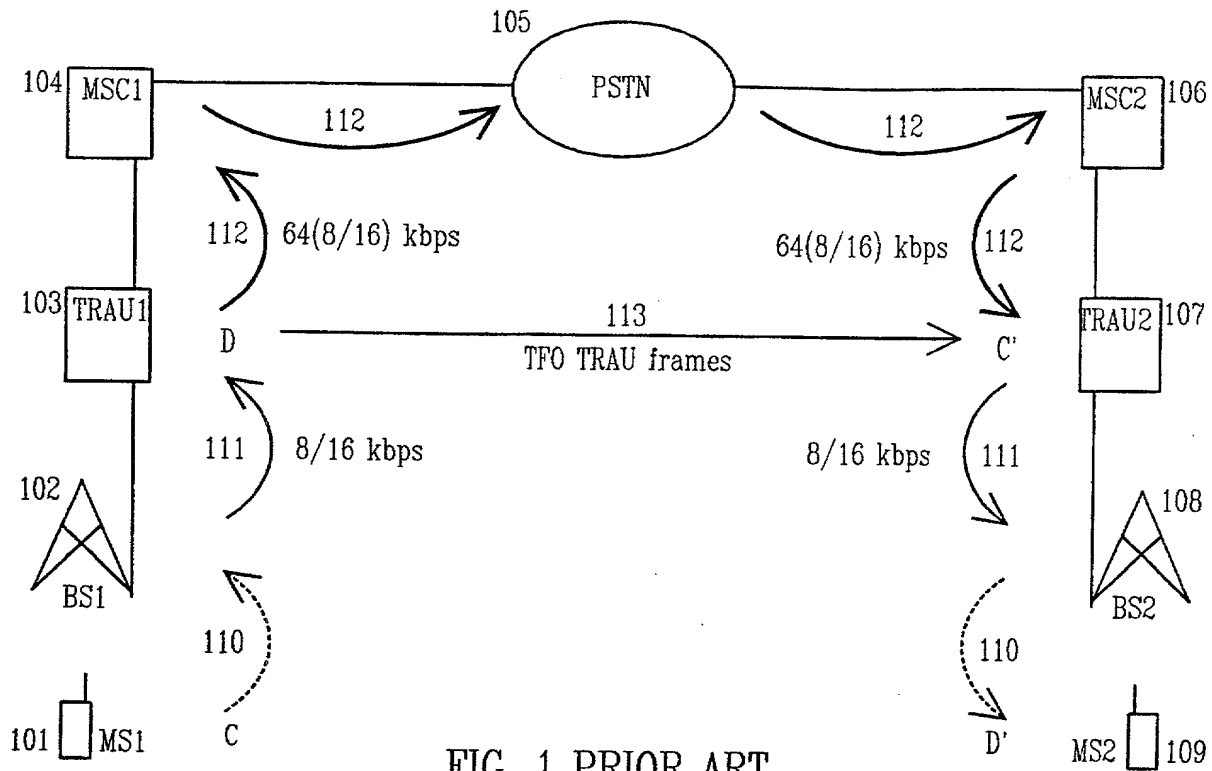


FIG. 1 PRIOR ART

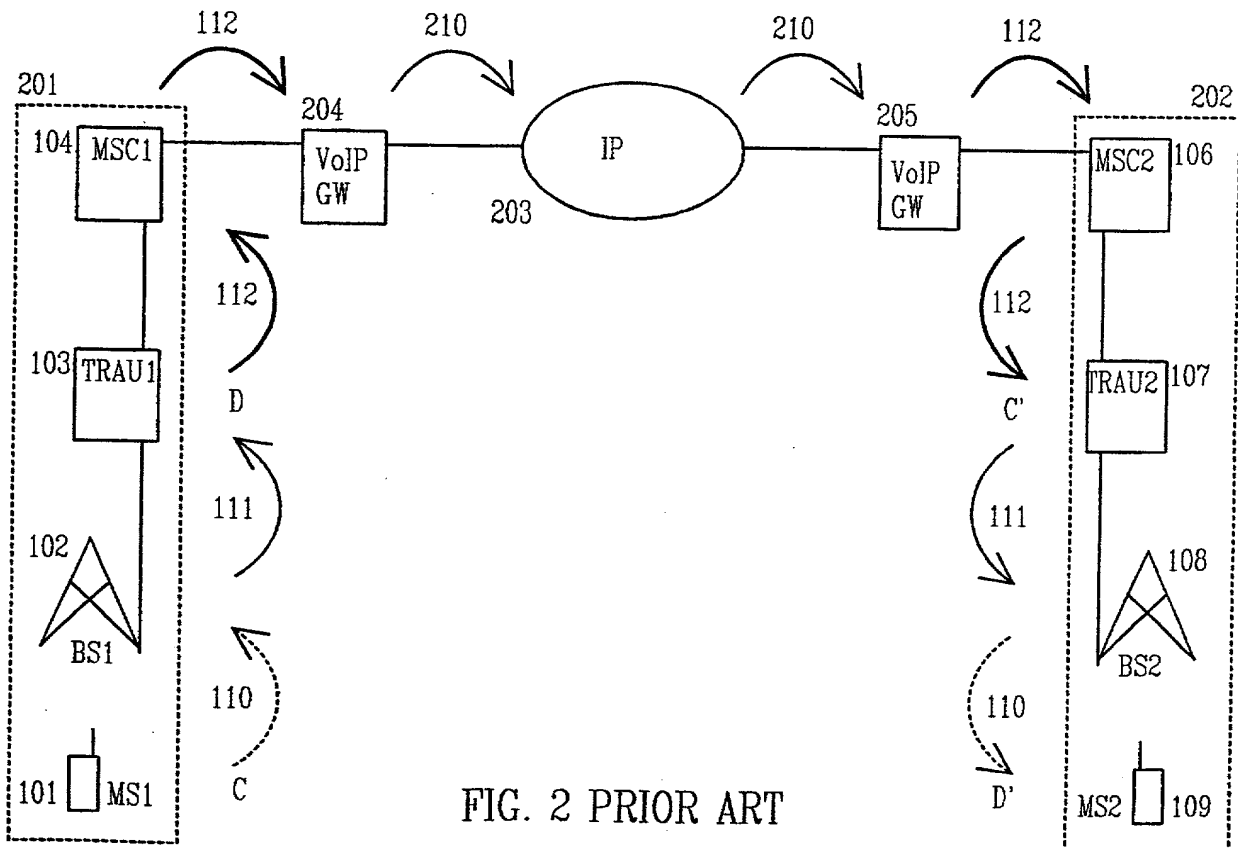


FIG. 2 PRIOR ART

2/4

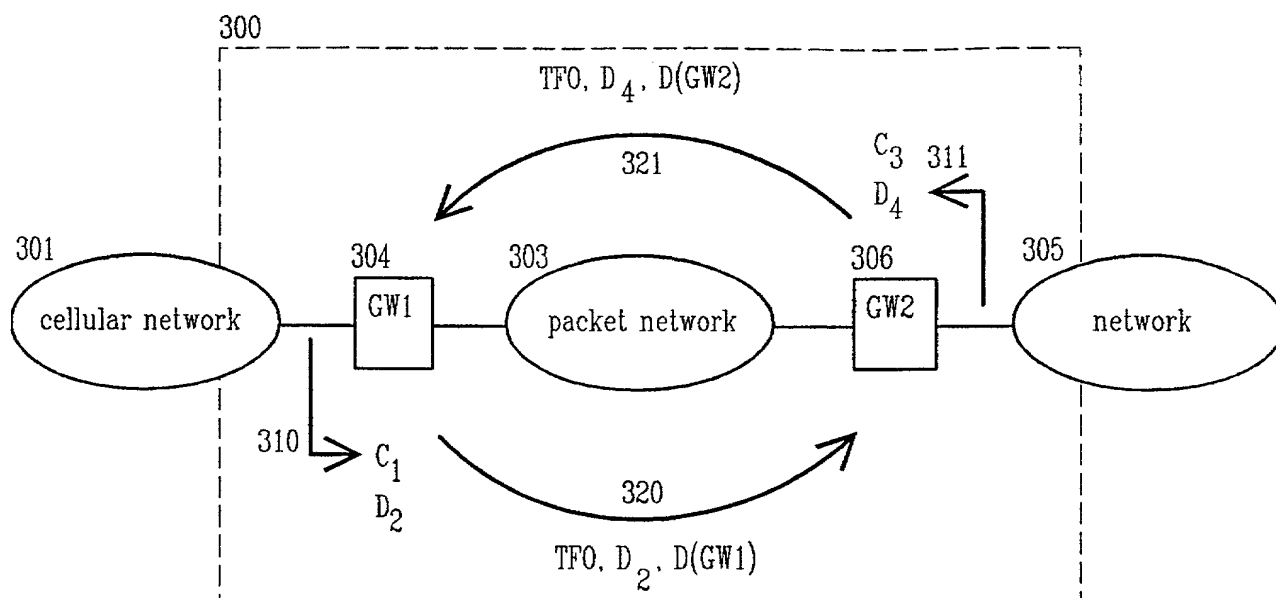


FIG. 3

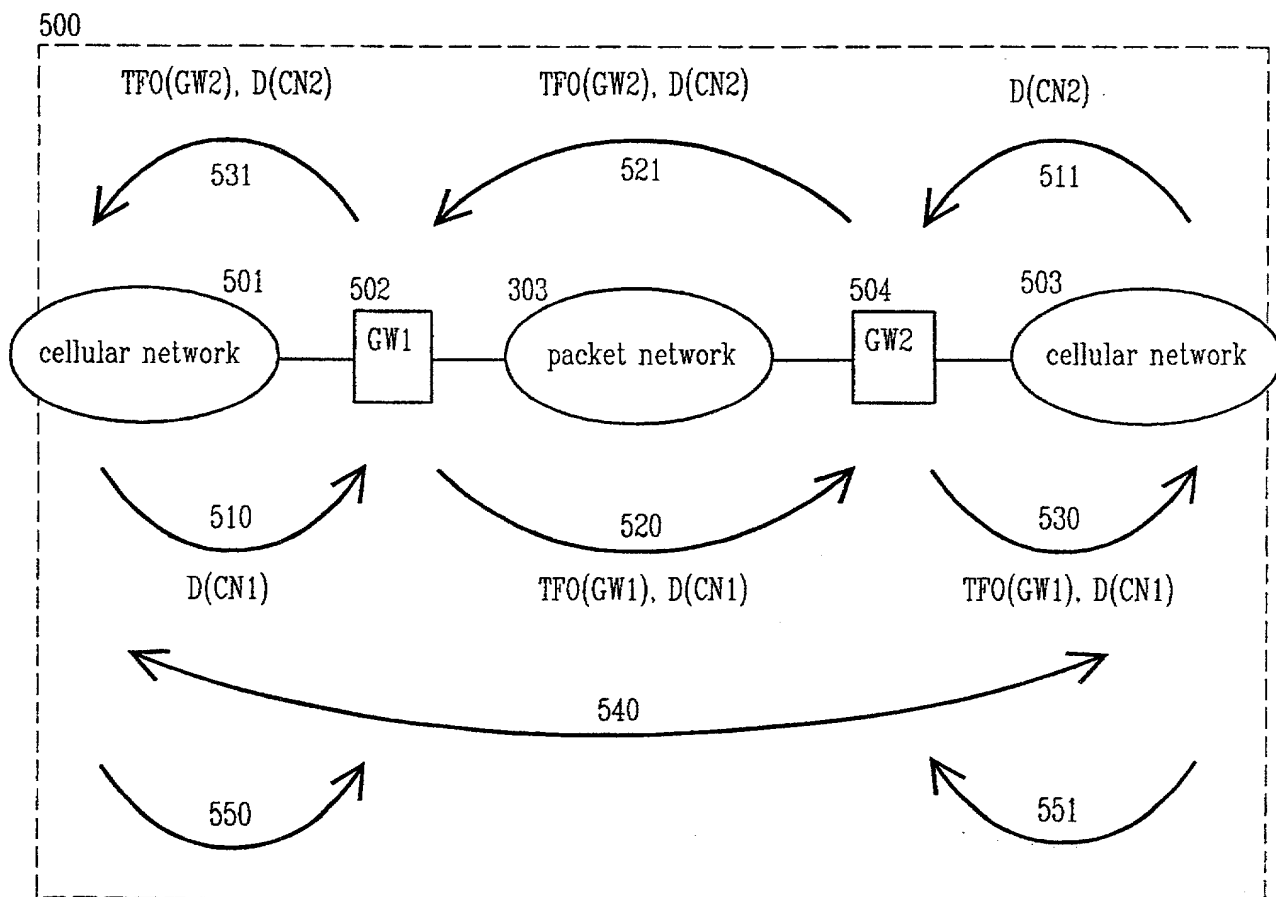


FIG. 5

3/4

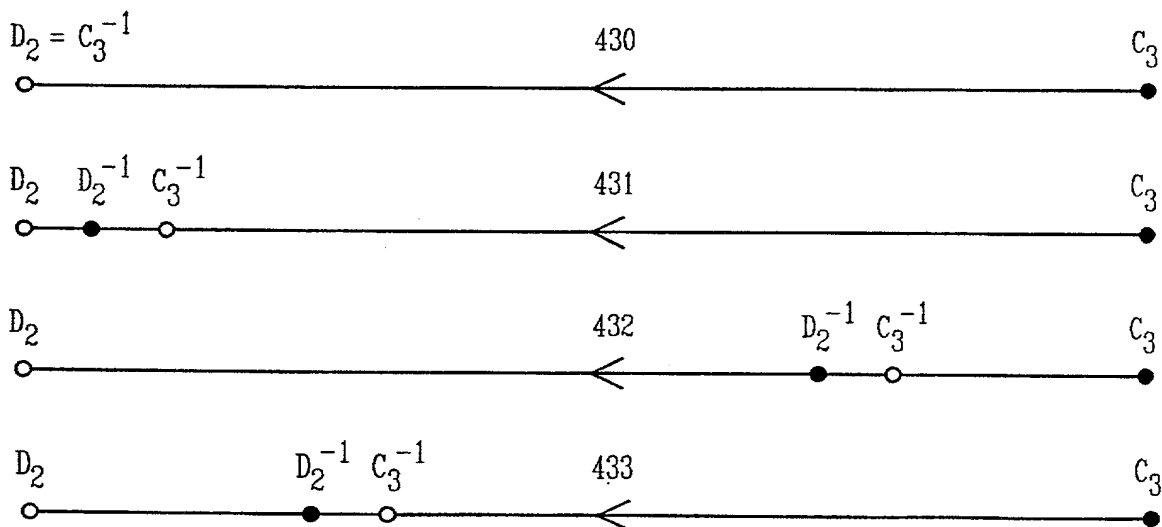
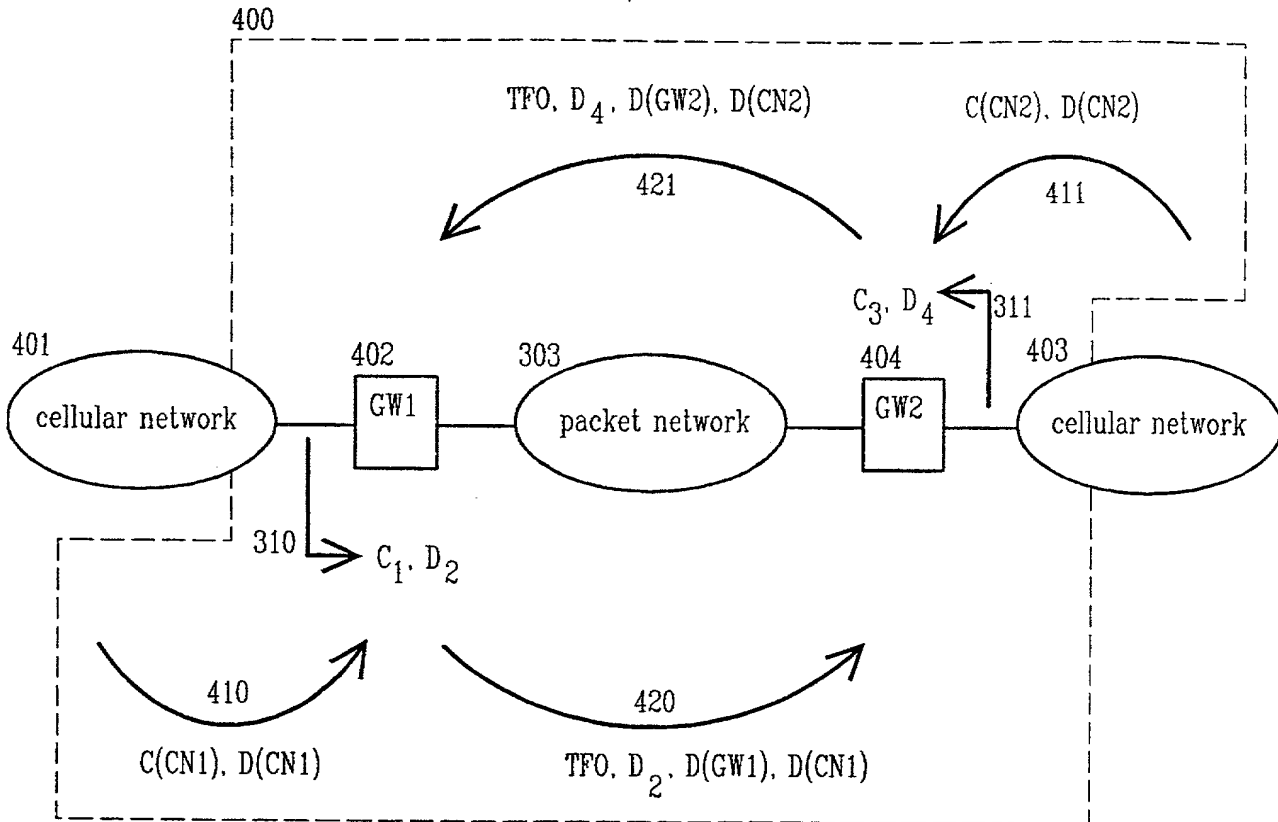


FIG. 4

4/4

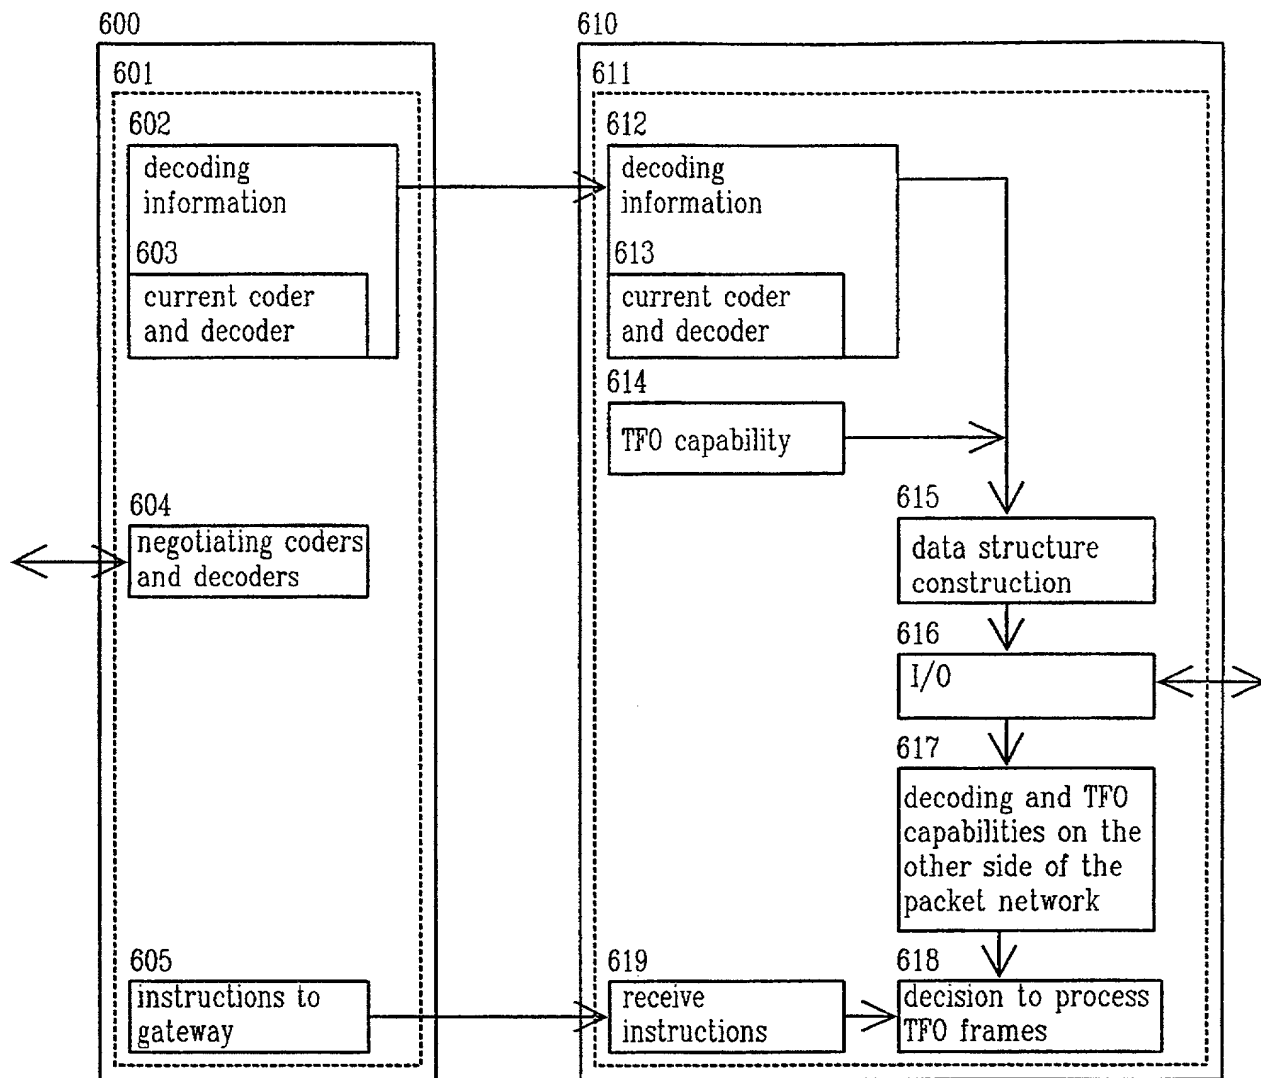


FIG. 6

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY
Includes Reference to PCT International Applications

Attorney's Docket
No. 4925-194PUS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD FOR TRANSMITTING CODING INFORMATION OVER PACKET DATA NETWORK

the specification of which (check only one item below)

☐ is attached hereto

☐ was filed as United States application

Serial No. _

on _

and was amended

on _ (if applicable).

☒ was filed as PCT international application

Number PCT/FI00/00621

on 06 July 2000

and was amended under PCT Article 19

on _ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of the application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

PRIOR FOREIGN/PCT APPLICATIONS AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

Country (if PCT, indicate "PCT")	Application Number	Date of Filing (day, month, year)	Priority Claimed Under 35 U.S.C. 119	
Finland	991583	09 July 1999	<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO
PCT	PCT/FI00/00621	06 July 2000	<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO

Combined Declaration for Patent Application and Power of Attorney (Continued)
(Includes Reference to PCT International Applications)

Attorney's Docket No.
4925-194PUS

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

U.S. APPLICATIONS		STATUS (check one)		
U.S. APPLICATION NUMBER	U.S. FILING DATE	PATENTED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S.				
PCT APPLICATION NO.	PCT FILING DATE	U.S. SERIAL NUMBERS ASSIGNED (if any)		
PCT/FI00/00621	06 July 2000		X	


POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (*List name and registration number*)

MYRON COHEN, Reg. No. 17,358; THOMAS C. PONTANI, Reg. No. 29,763; LANCE J. LIEBERMAN, Reg. No. 28,437; MARTIN B. PAVANE, Reg. No. 28,337; MICHAEL C. STUART, Reg. No. 35,698; KLAUS P. STOFFEL, Reg. No. 31,668; EDWARD WEISZ, Reg. No. 37,257; VINCENT M. FAZZARI, Reg. No. 26,879; JULIA S. KIM, Reg. No. 36,567; ALFRED FROEBRICH, Reg. No. 38,887; ALFRED H. HEMINGWAY, JR., Reg. No. 26,736; KENT H. CHENG, Reg. No. 33,849; YUNLING REN, Reg. No. 47,019; ROGER S. THOMPSON, Reg. No. 29,594; BRICE FALLER, Reg. No. 29,532; DAVID J. ROSENBLUM, Reg. No. 37,709; TONY CHEN, Reg. No. 44,607; ELI WEISS, Reg. No. 17,765.

Send correspondence to:
Michael C. Stuart
Reg. No. 35,698
Cohen, Pontani, Lieberman & Pavane
551 Fifth Avenue, Suite 1210
New York, New York 10176

Direct Telephone calls to:
(name and telephone number)
Michael C. Stuart
(212) 687-2770

201	FULL NAME OF INVENTOR	FAMILY NAME <u>KOISTINEN</u>	FIRST GIVEN NAME <u>Tommi</u>	SECOND GIVEN NAME
	RESIDENCE, CITIZENSHIP	CITY <u>Espoo</u>	STATE OR FOREIGN COUNTRY <u>Finland</u> <u>FIX</u>	COUNTRY OF CITIZENSHIP <u>Finland</u>
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>Kyyhkysmäki 22 B 19</u>	CITY <u>Espoo</u>	STATE & ZIP CODE/COUNTRY <u>FIN-02600 Finland</u>
202	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE, CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY

Combined Declaration for Patent Application and Power of Attorney (Continued) (Includes Reference to PCT International Applications)				Attorney's Docket No. 4925-194PUS
2 0 3	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE, CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
<p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.</p>				
SIGNATURE OF INVENTOR 201 		SIGNATURE OF INVENTOR 202		SIGNATURE OF INVENTOR 203
DATE 25.1.2002		DATE		DATE